



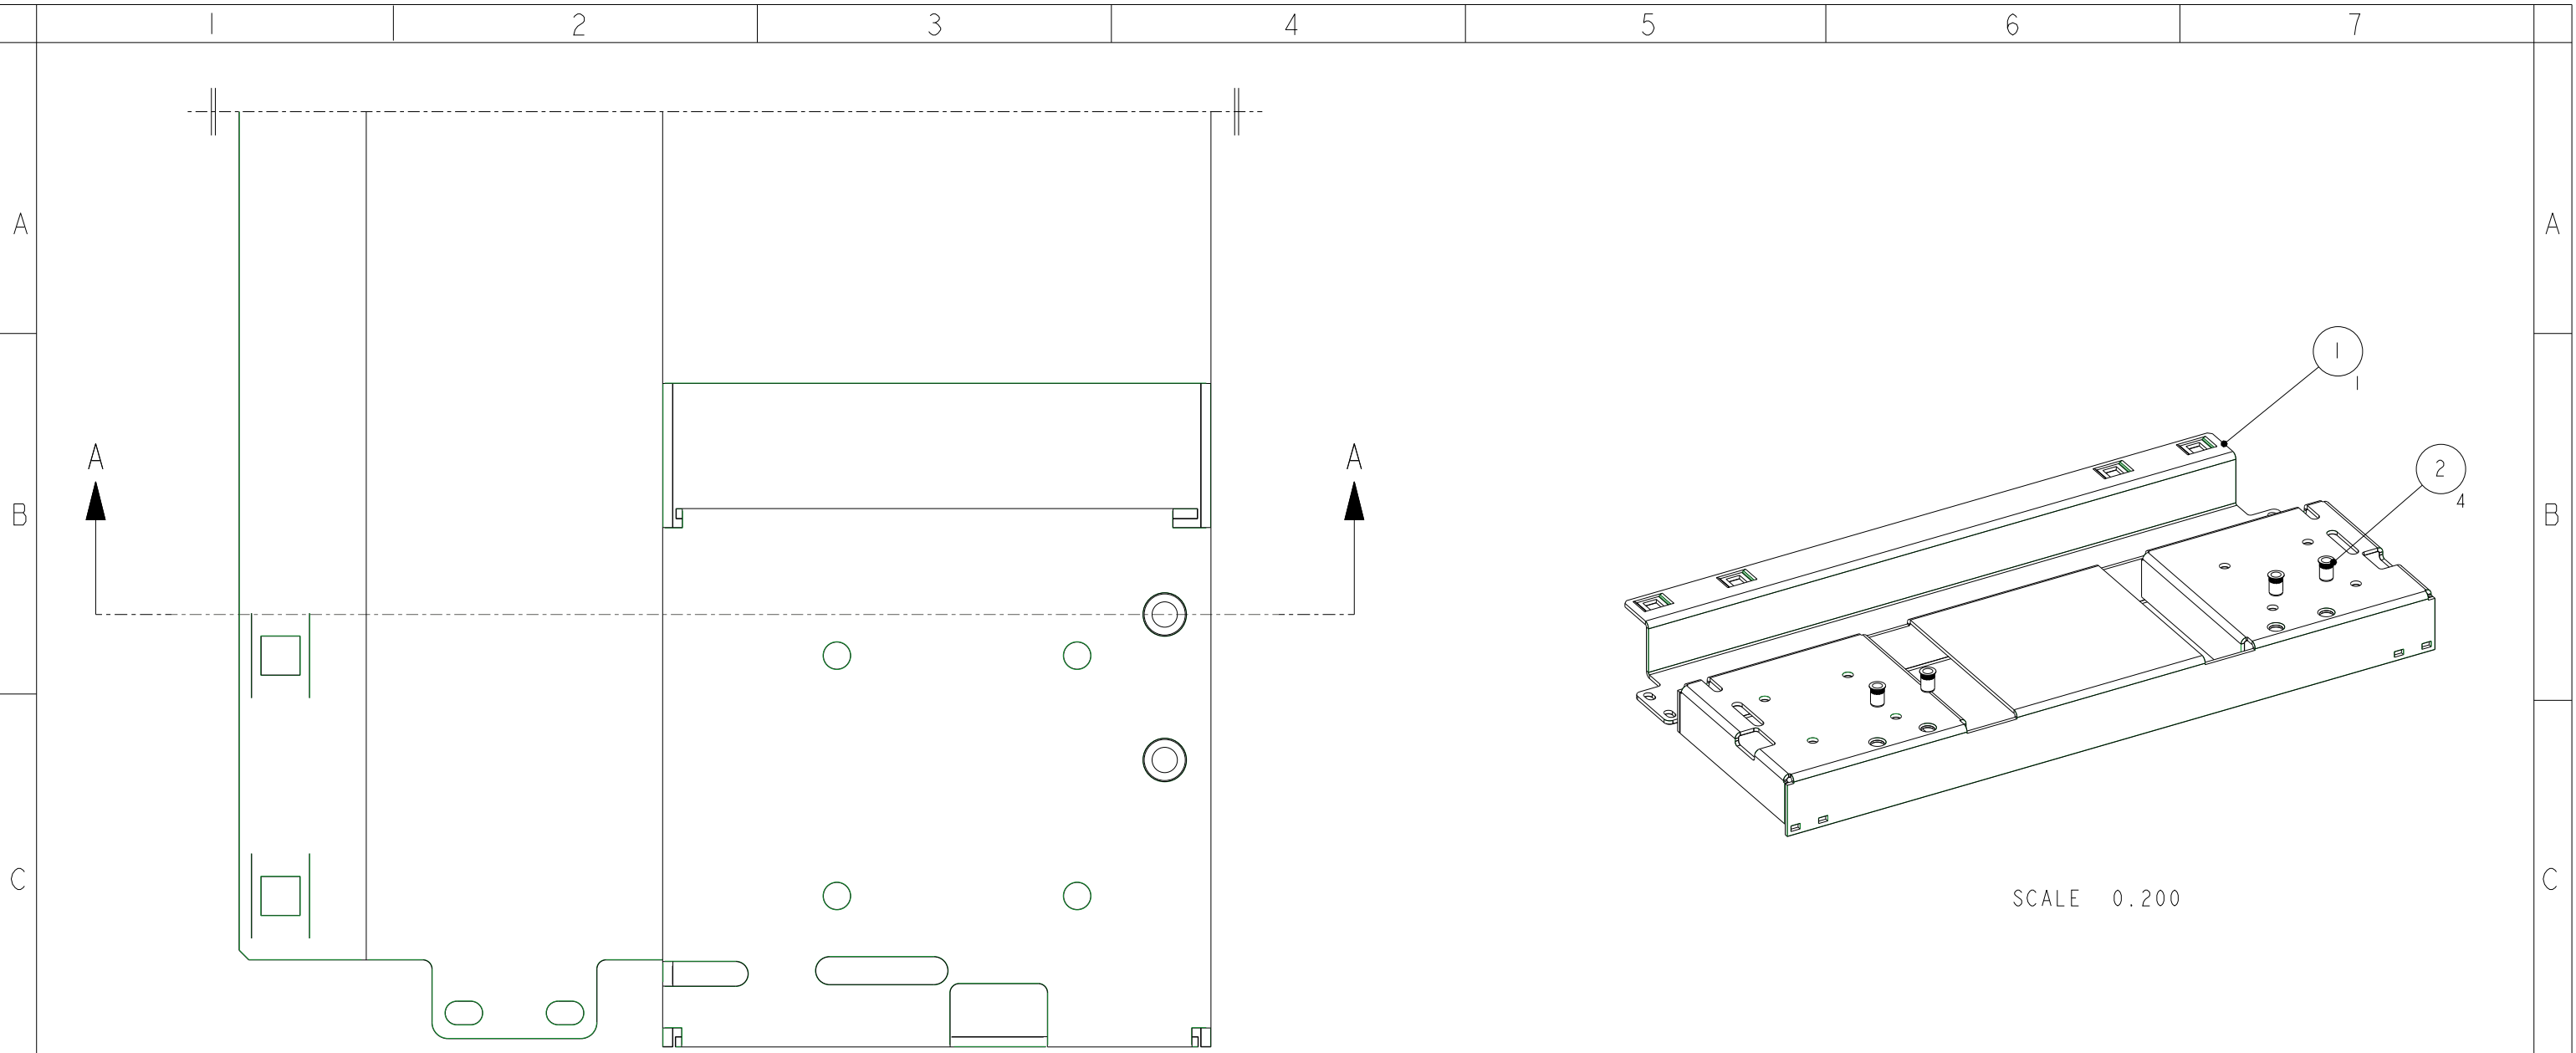

ENSURE NUTSERTS ARE FLUSH
OR UNDERFLUSH TO SURFACE

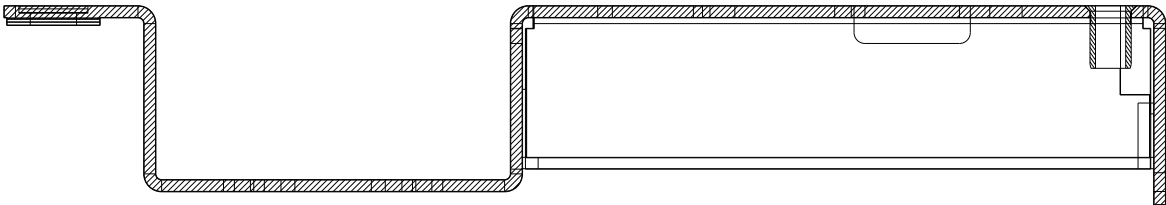


SECTION A-A

- NOTES**
- FINISH:- PAINT BLACK
 - PAINT THICKNESS APPLIED = 0.12MM±10%
 - REFERENCE DRAWINGS: - Na
 - SHARP EDGES & BURRS: - FINISHED COMPONENTS (PAINTED, PLATED, RAW) PARTS: ALL EDGES SHALL BE CONDITIONED FOR HANDLING WITH BURRS NO GREATER THAN 10% MATERIAL THICKNESS, ACCORDING TO ISO 13715, AND MUST CONFORM TO UL 1439.
 - FINISHED PRODUCTS: ALL EDGES MUST CONFORM TO UL1439.
 - RELEASE LEVEL: - Concept

2	4	T.S.F. NUTSERT BOLLHÖFF 23317080300 M8	430911	23317080300
1	1	PLATE BASE TRAY STIFFENING PNT	432571	C29998
ITEM	QTY	DESCRIPTION	PART No.	DRWG No.

BILL OF MATERIALS



THIRD ANGLE PROJECTION.	MASS APPROX.	6.1 Kg
TOLERANCE UNLESS OTHERWISE STATED ANSI STANDARD:		
0.0	±0.8	
0.00	±0.5	
0.000	±0.25	
ANGLES	±1.0°	
ALL DIM'S ARE IN MM.		

SCALE 0.50 @ A3	MATERIAL	MULTIPLE
DESCRIPTION	O.C.P. v3	META
PLATE BASE TRAY STIFFENING ASM		
DWG No	C29940	1
		1 OF 1

1	ECN 9571	11/06/22	P.C		
ISS.	E.C.N. No / DESCRIP	DATE	NAME	CHK'D	