

NOTES:

1. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-2009.
2. ALL DIMENSIONS ARE IN MM
3. ALL COMPONENTS SHALL BE UL 94 5VA EQUIVALENT AND ROHS COMPLIANT
4. TOLERANCES ARE ± 2 MM UNLESS OTHERWISE SPECIFIED
5. ALL DIMENSIONS SHOWN BELOW ARE CTF (CRITICAL TO FUNCTION)
6. ALL NON-DIMENSIONED FEATURES OF THIS PART ARE CONTROLLED BY THE CAD
7. MATERIAL: WCD-BRFB-2102FP
8. MANUFACTURING PROCESS SHALL COMPLY WITH FACEBOOK SPEC 18-000325. PLEASE REFER TO THIS SPEC FOR DETAILS ON DESIGN AND EVALUATION PROCESS
9. ADD TEXT "MATERIAL IS RECYCLED AND FLAME RETARDANT" ON FRONT SURFACE PRINTED IN POSITIVE BLACK INK
10. PRINT MANUFACTURING DATE IN POSITIVE BLACK INK ON THE REAR SURFACE OF THE BOX, APPROXIMATELY WHERE SHOWN. FORMAT TO BE MM/YYYY
11. FRONT OF THE BOX MUST HAVE INTEGRATED EJECTOR TABS TO ASSIST WITH BOX REMOVAL FROM RACK
12. ALL EDGES TO BE CRIMPED DURING DIE-CUTTING PROCESS, AND BEND EDGES 180° TO AVOID EXPOSURE OF EDGES WHERE FEASIBLE


REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
	01	INITIAL RELEASE	01/31/2022	D. SHAPIRO

10



730.6

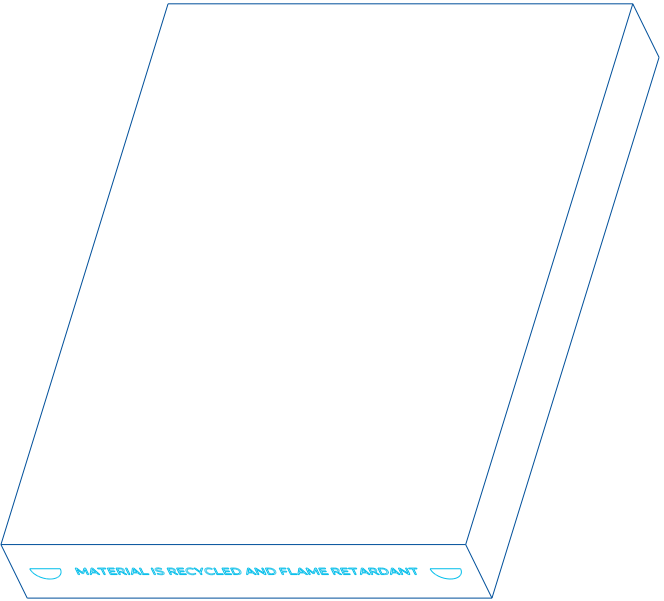

ISO VIEW

91.15



534

9

11

	NAME	DATE	facebook	
DRAWN	D.SHAPIRO	01/31/22		
CHECKED	D.SHAPIRO	01/31/22		
ENGINEER	D.SHAPIRO	01/31/22	TITLE: BAFFLE, ORV3 AIRFLOW 20U CARDBOARD BOX RECYCLED AND FLAME RETARDANT, SHORT	
PROPRIETARY AND CONFIDENTIAL				
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FACEBOOK. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT PERMISSION OF FACEBOOK IS PROHIBITED.			05-000677	
			REV 01	
			THIRD PROJECTION	
			1 OF 1	