



NOTES:

1. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-2009.
2. ALL DIMENSIONS ARE IN MM
3. ALL COMPONENTS SHALL BE UL 94 5VA EQUIVALENT AND ROHS COMPLIANT
4. TOLERANCES ARE ± 2 MM UNLESS OTHERWISE SPECIFIED
5. ALL DIMENSIONS SHOWN BELOW ARE CTF (CRITICAL TO FUNCTION)
6. ALL NON-DIMENSIONED FEATURES OF THIS PART ARE CONTROLLED BY THE CAD
7. MATERIAL: WCD-BRFB-2102FP
8. MANUFACTURING PROCESS SHALL COMPLY WITH FACEBOOK SPEC 18-000325. PLEASE REFER TO THIS SPEC FOR DETAILS ON DESIGN AND EVALUATION PROCESS
- 9 ADD TEXT "MATERIAL IS RECYCLED AND FLAME RETARDANT" ON FRONT SURFACE PRINTED IN POSITIVE BLACK INK
- 10 PRINT MANUFACTURING DATE IN POSITIVE BLACK INK ON THE REAR SURFACE OF THE BOX, APPROXIMATELY WHERE SHOWN. FORMAT TO BE MM/YYYY
- 11 FRONT OF THE BOX MUST HAVE INTEGRATED EJECTOR TABS TO ASSIST WITH BOX REMOVAL FROM RACK
12. ALL EDGES TO BE CRIMPED DURING DIE-CUTTING PROCESS, AND BEND EDGES 180° TO AVOID EXPOSURE OF EDGES WHERE FEASIBLE

10

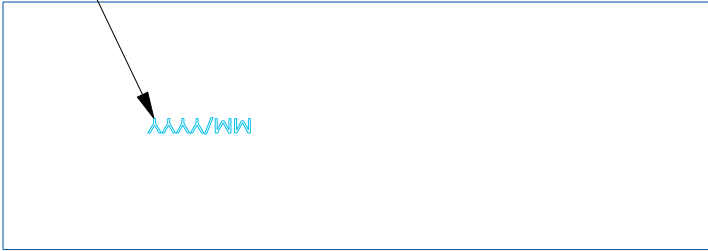

730.6

187.15




534

9

11

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
	01	INITIAL RELEASE	01/31/2022	D. SHAPIRO

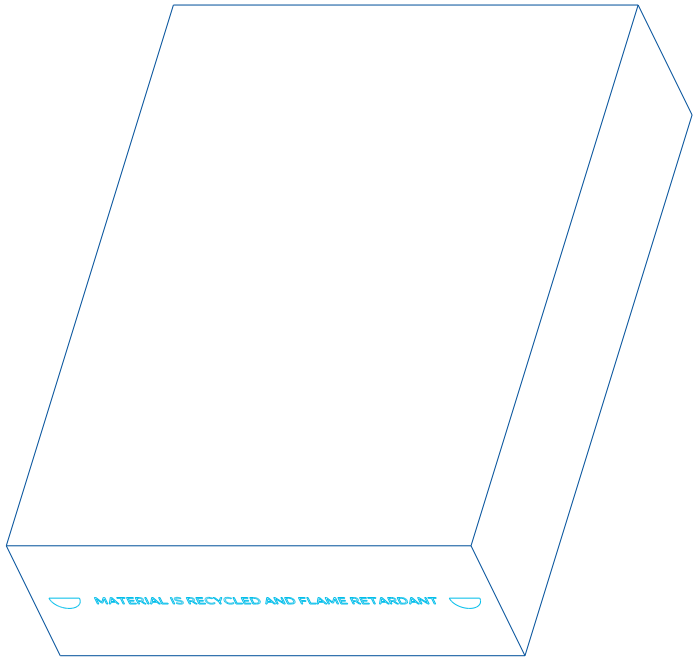

ISO VIEW

	NAME	DATE		
DRAWN	D.SHAPIRO	01/31/22	TITLE: BAFFLE, ORV3 AIRFLOW 40U CARDBOARD BOX RECYCLED AND FLAME RETARDANT, SHORT	
CHECKED	D.SHAPIRO	01/31/22		
ENGINEER	D.SHAPIRO	01/31/22		
PROPRIETARY AND CONFIDENTIAL				
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FACEBOOK. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT PERMISSION OF FACEBOOK IS PROHIBITED.			05-000679	REV 01
			THIRD PROJECTION	1 OF 1