



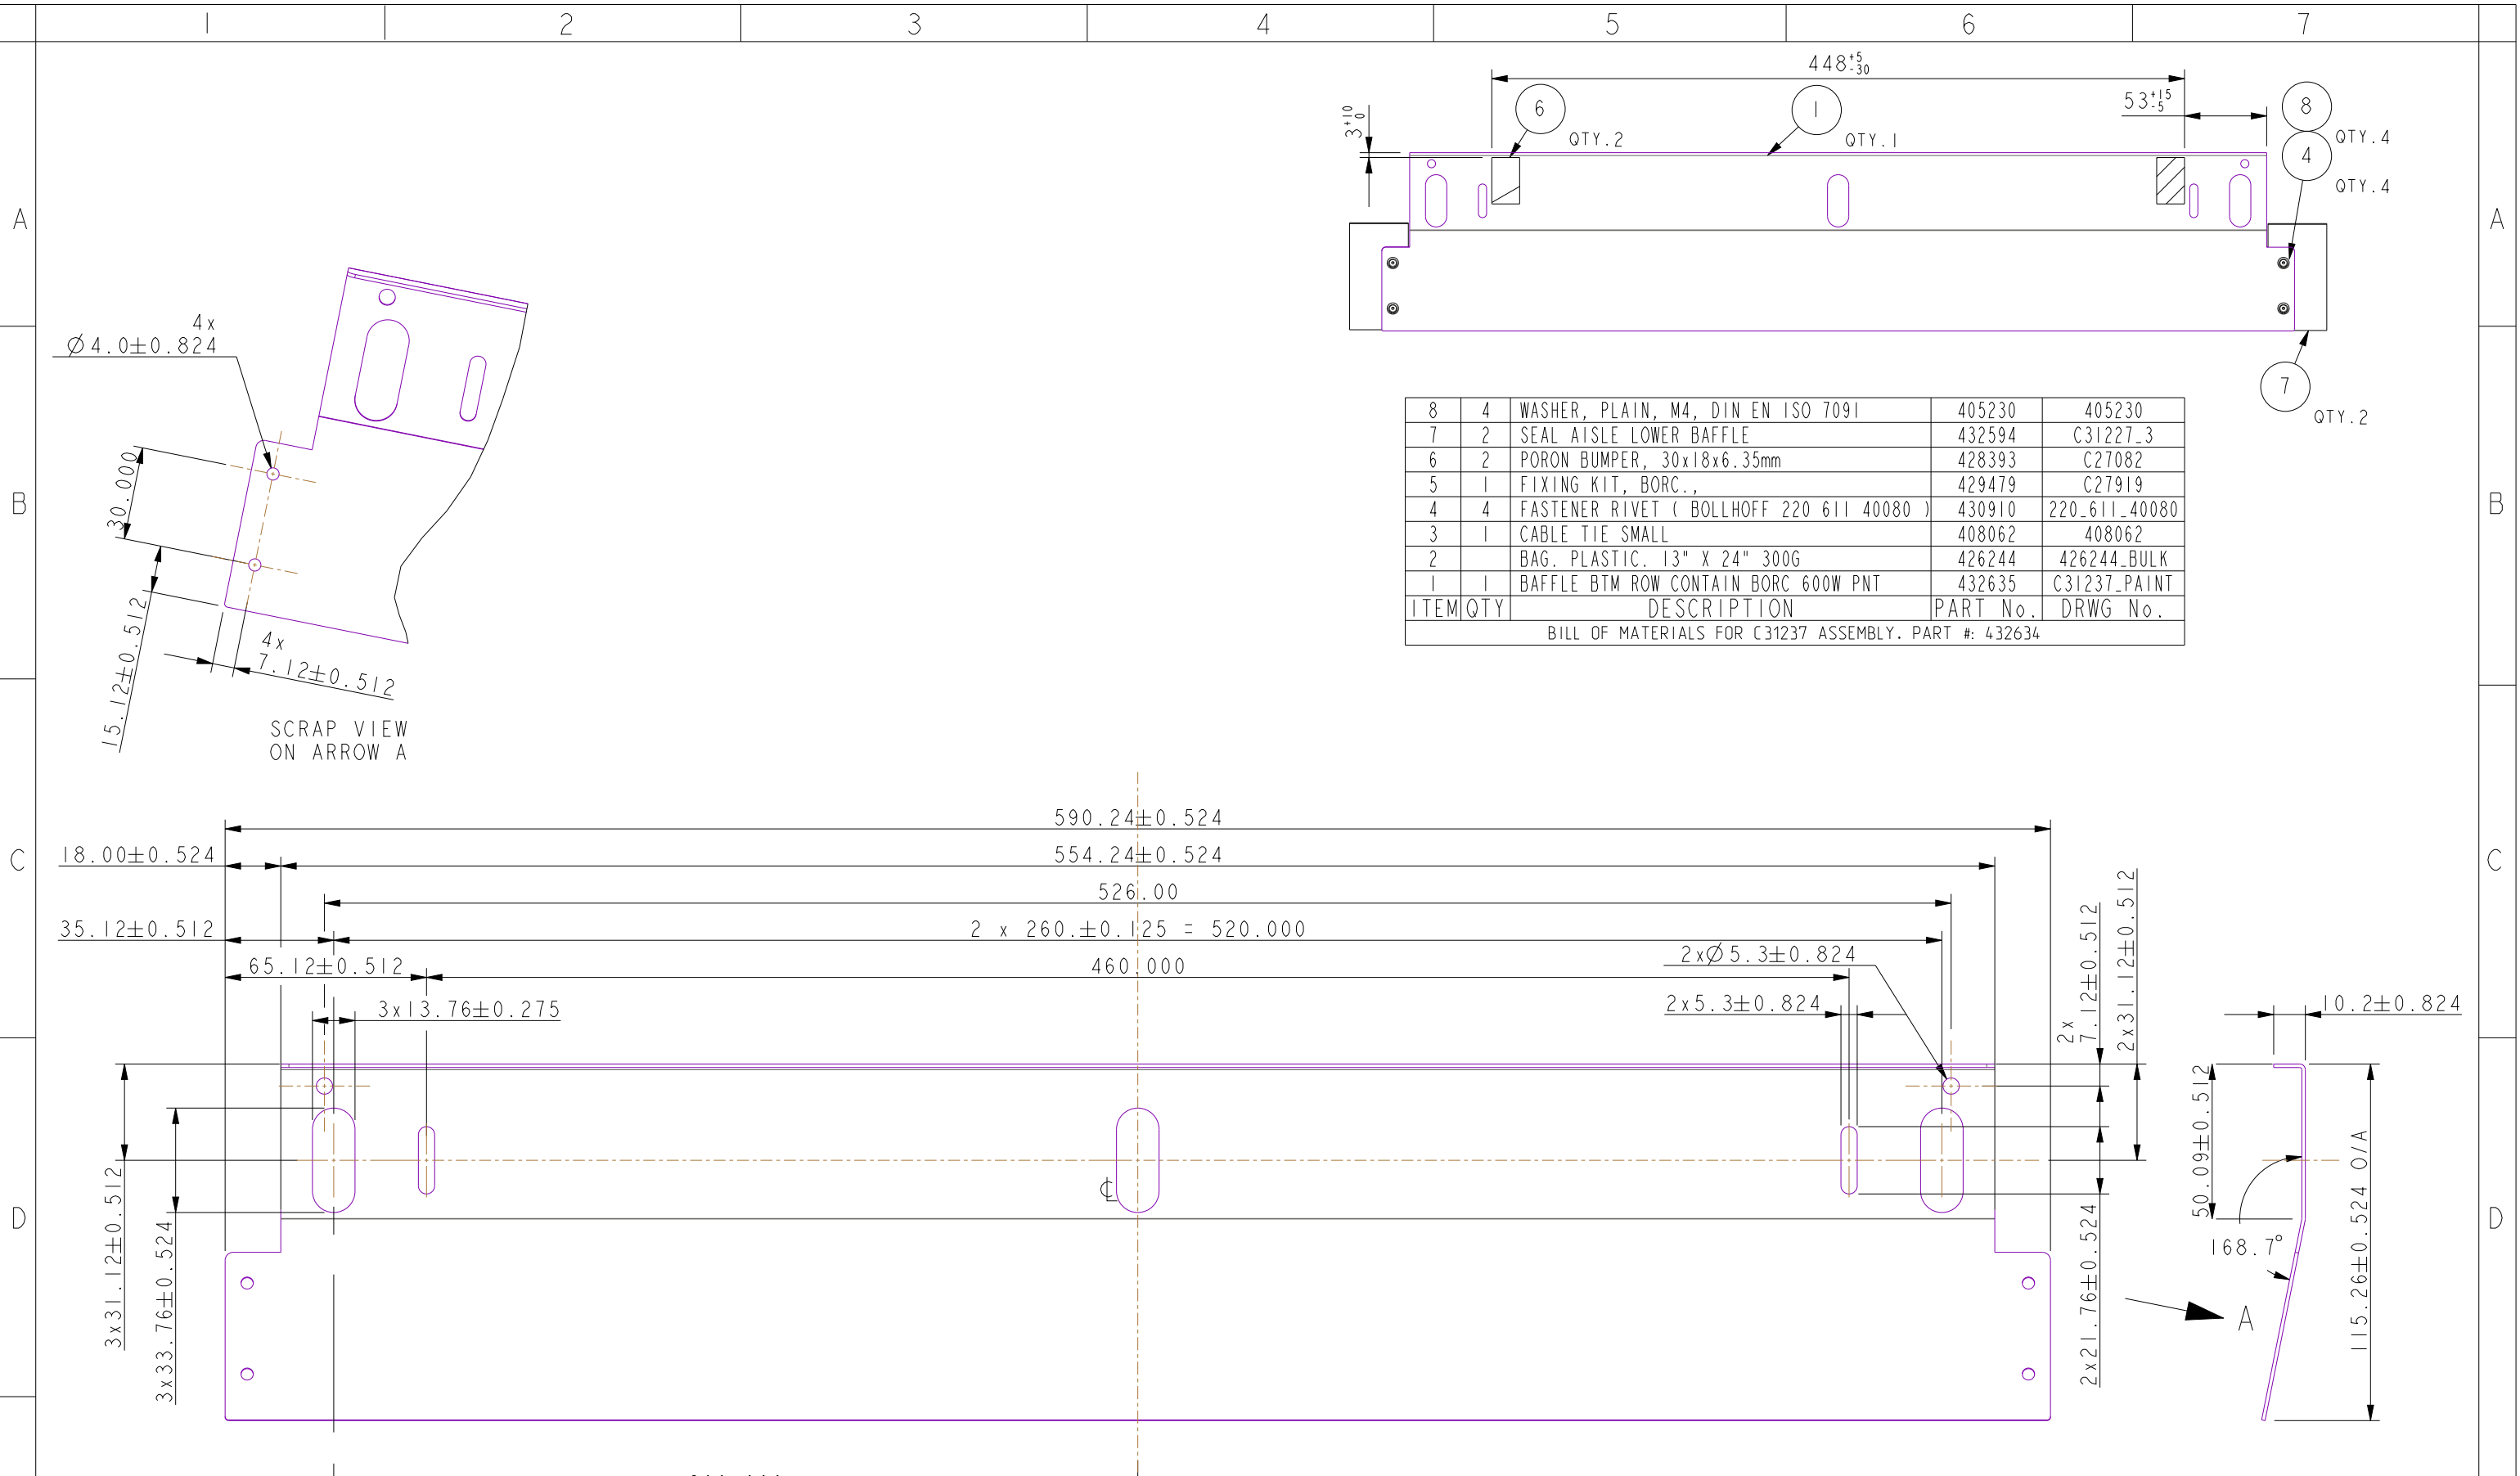


8	4	WASHER, PLAIN, M4, DIN EN ISO 7091	405230	405230
7	2	SEAL AISLE LOWER BAFFLE	432594	C31227.3
6	2	PORON BUMPER, 30x18x6.35mm	428393	C27082
5	1	FIXING KIT, BORC.,	429479	C27919
4	4	FASTENER RIVET (BOLLHOFF 220 611 40080)	430910	220_611_40080
3	1	CABLE TIE SMALL	408062	408062
2		BAG, PLASTIC, 13" X 24" 300G	426244	426244.BULK
1	1	BAFFLE BTM ROW CONTAIN BORC 600W PNT	432635	C31237_PAINT
ITEM	QTY	DESCRIPTION	PART No.	DRWG No.
BILL OF MATERIALS FOR C31237 ASSEMBLY. PART #: 432634				

- NOTES
- FINISH:PAINT BLACK
 - DIMENSIONS AND TOLERANCES ARE AFTER PAINT
 - PAINT THICKNESS APPLIED = 0.12±10%
 - MATERIAL(SPECIFIC): -STEEL, MILD, COLD-ROLLED, to EN 10130:2006 Gr.DC01
 - RELEASE LEVEL: - ECN Production
 - ALL EXTERNAL EDGES SHALL BE WITHOUT BURR (BURR FREE) ACCORDING TO ISO 13715 AND CONFORM TO U1439.
 - SEE SHEET 2 FOR ASSEMBLED ITEM.



Meta

THIRD ANGLE PROJECTION.



ALL DIM'S ARE IN MM.

MASS APPROX.

0.5 Kg

TOLERANCE UNLESS OTHERWISE STATED ANSI STANDARD:
0.0 : ±0.8
0.00 : ±0.5
0.000 : ±0.25
ANGLES : ±1.0°

(CRITICAL DIMENSION)

SCALE 0.50 @ A3	
MATERIAL MILD-STEEL-DC01, 0.9mm-THK	
DESCRIPTION	OCP v3 META
BAFFLE BTM ROW CONTAIN BORC 600W PNT	
DWG No	C31237
	1
1 OF 1	