


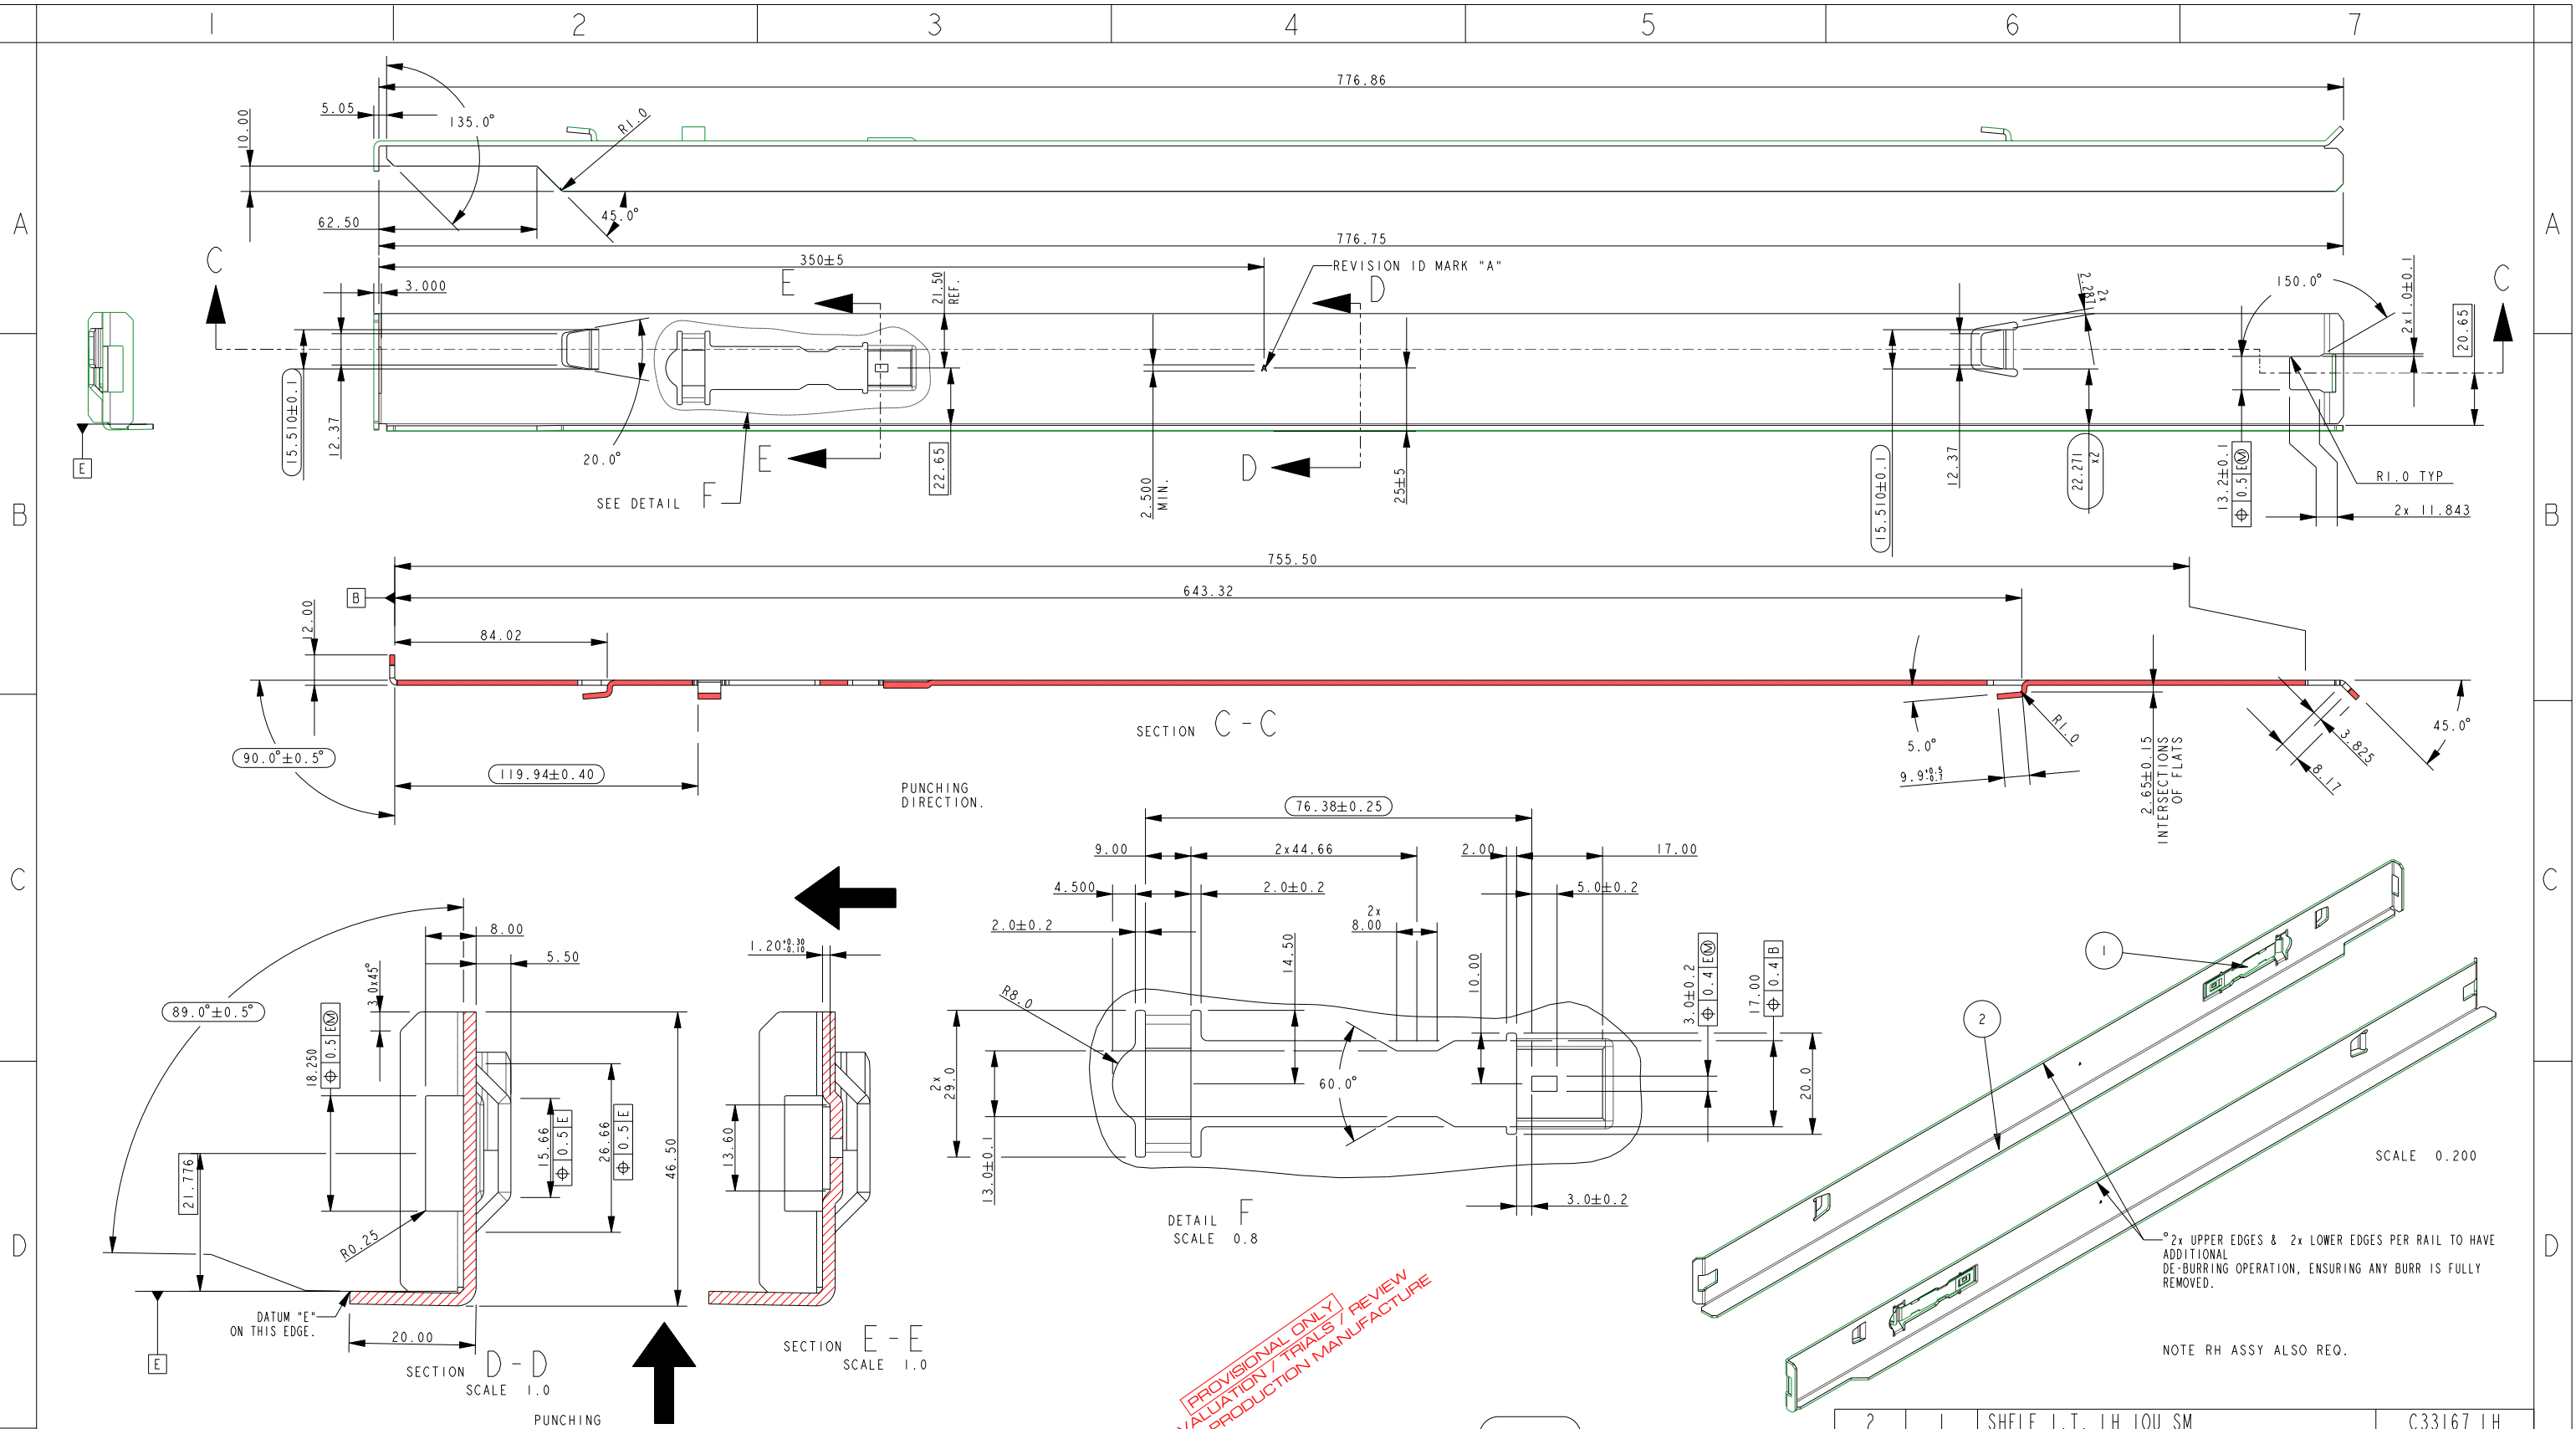

NOTES

- GEOMETRY:- L/H AND RIGHT COMPONENTS REQUIRED (R/H FULLY DIMENSIONED)
- ALL GEOMETRICAL TOLERANCES CONSIDERED "CRITICAL" CP=> 1.33. BASIC DIMENSIONS ARE CONTAINED IN A [RECTANGULAR BOX] WITH THE TOLERANCE RANGE DEFINED IN THE ASSOCIATED GEOMETRICAL TOLERANCE.
- FINISH:- Z/P 38µ TARGET THK'NES
- REFERENCE DRAWINGS:- Na.
- SHARP EDGES & BURRS:- FINISHED COMPONENTS (PAINTED, PLATED, RAW) PARTS: ALL EDGES SHALL BE CONDITIONED FOR HANDLING WITH BURRS NO GREATER THAN 10% MATERIAL THICKNESS, ACCORDING TO ISO 13715, AND MUST CONFORM TO UL 1439.
- HIGHLIGHTED EDGES REQUIRE SECONDARY DE-BURRING OPERATION, BUILT INTO HARD-TOOL, OR MANUAL POST PIERCE DE-BURRING OPERATION.
- MATERIALS (SPECIFIC):-STEEL, METALLIC COATED DX51D, Z/P 275g/m², ±0 EN 10346. QUALITY A.
- YOUNGS MODULUS: 200GPa±20GPa
- MIN.YIELD STRENGTH: 140MPa
- POISSONS RATIO: 0.27-0.3
- RELEASE LEVEL:- ECN Production

PROVISIONAL ONLY
FOR EVALUATION / TRIALS / REVIEW
NOT FOR PRODUCTION MANUFACTURE

DIMENSIONS CONTAINED
IN AN OBOUND REQUIRE
A CP OF 1.33

REV.	CHANGE	REVISION TRACKING	ECN	DATE	NAME	CHK	ZONE
1	N.P.I.(HOOK & id 'Ver A')	VERSION "A" I.D. MARK	E.C.N.9817	10/NOV/23	P.C.	J.H.	B6,C6

2	1	SHELF I.T. LH IOU SM	C33167_LH
1	1	LEVER SHELF RELEASE SPRING CLIP v2 SM	C32615
ITEM	QTY	DESCRIPTION	DRWG No.
BILL OF MATERIALS			
SCALE 0.40 @ A3			
MATERIAL STEEL_METALLIC_COATED_DX51D_275 2.0 THK'			
DESCRIPTION O.C.P. v3 META			
SHELF I.T. RH IOU SM			
SHELF I.T. LH IOU SM			
DWG No C33167_RH			1
C33167_LH			1 OF 1