



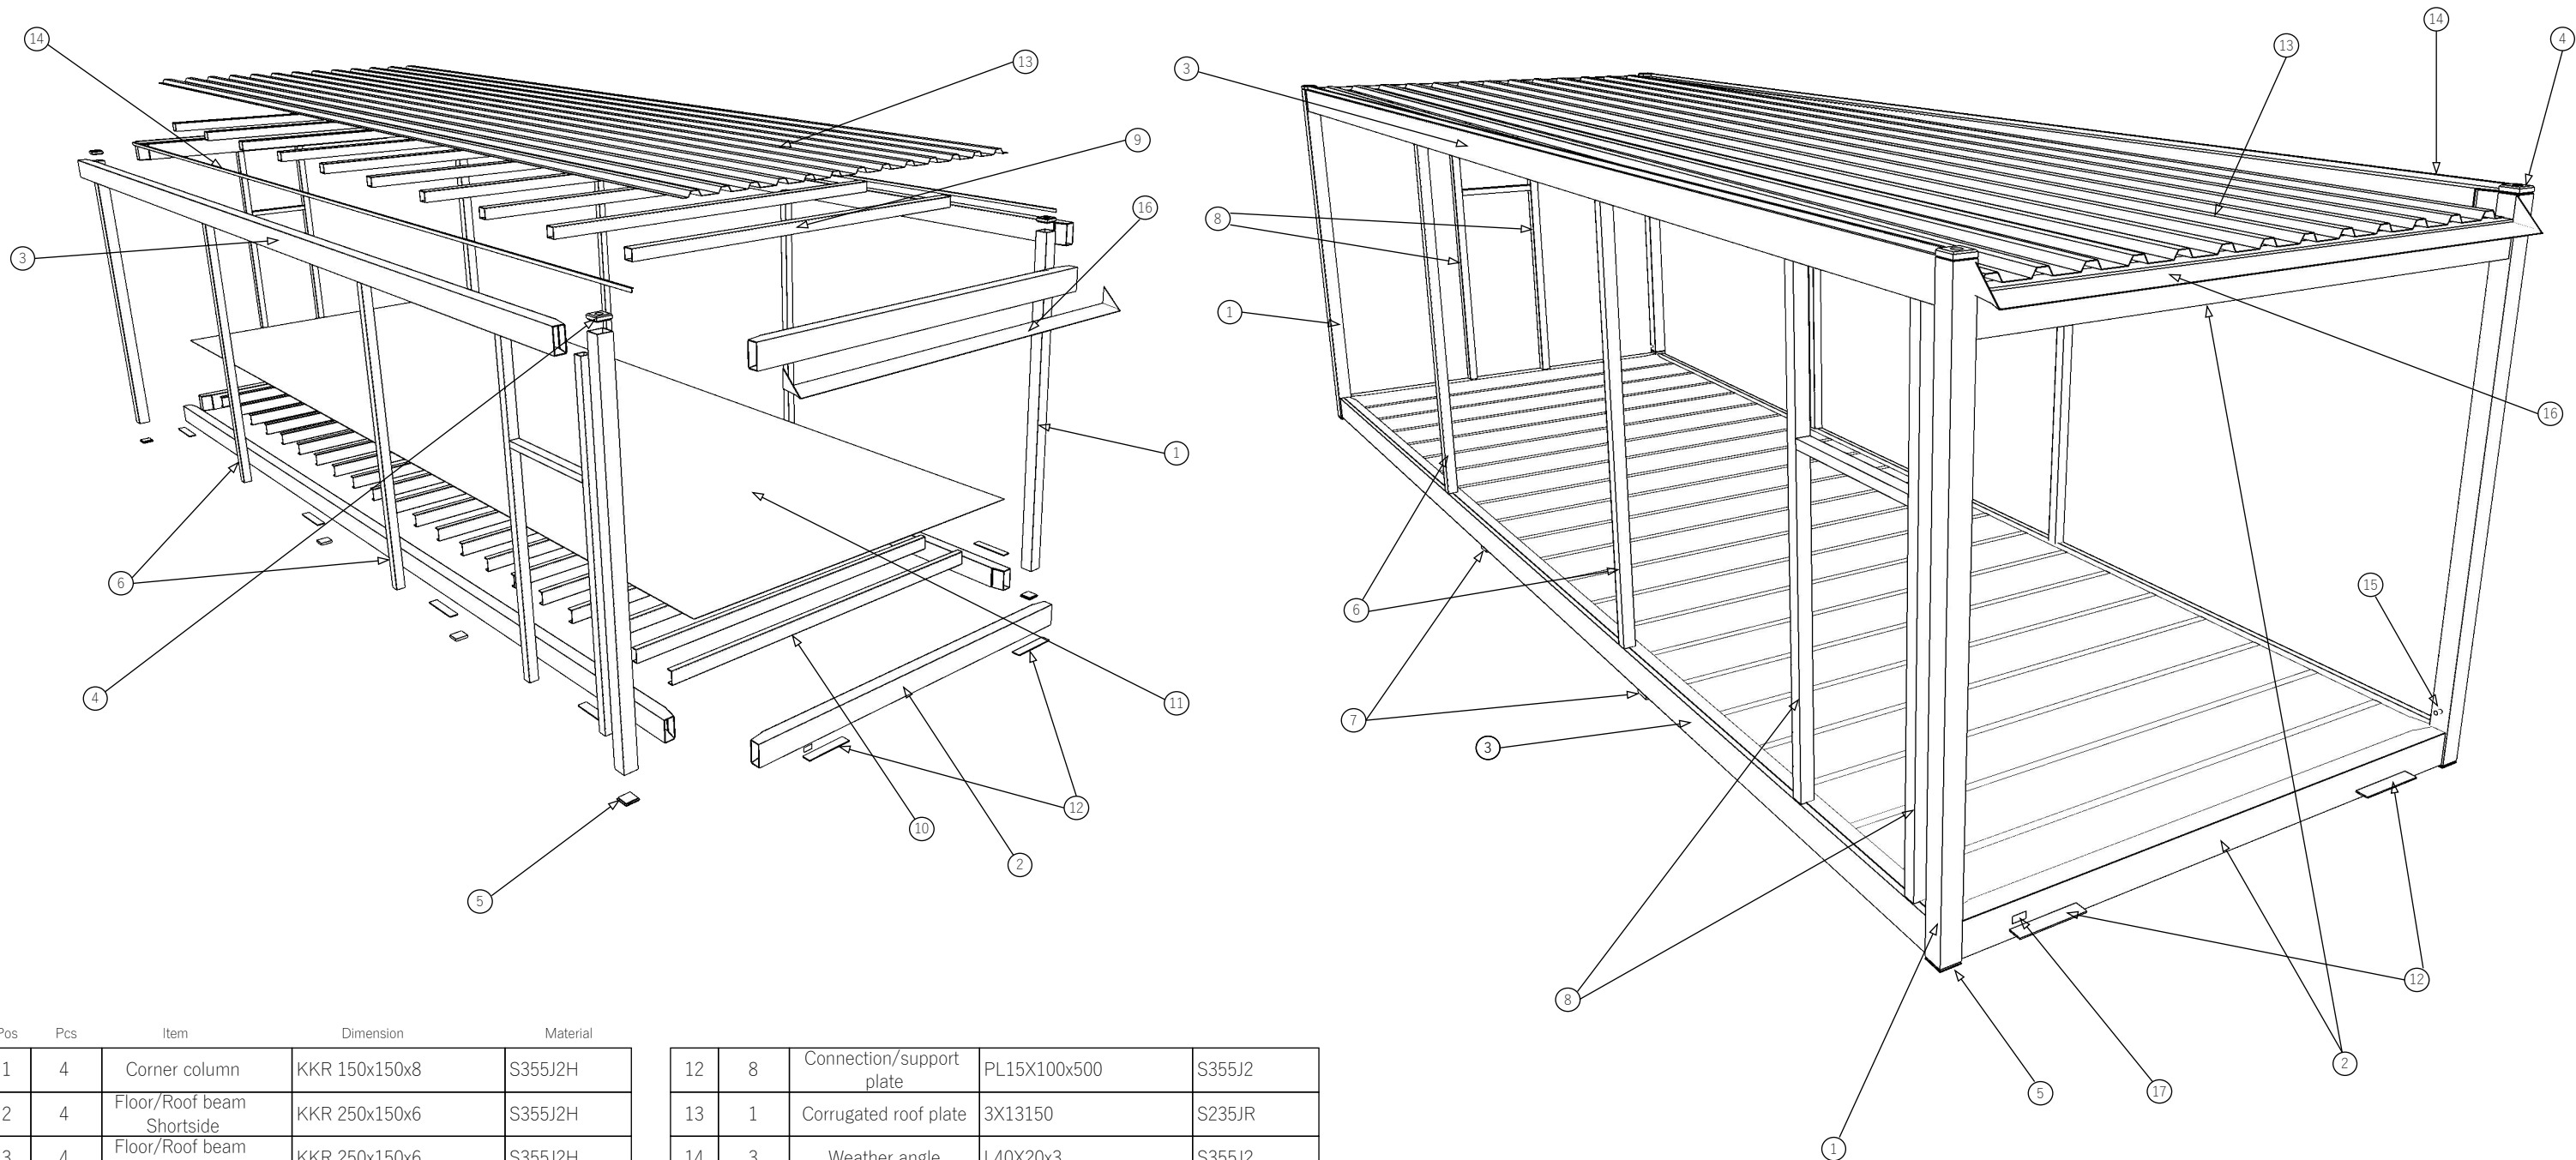

Pos	Pcs	Item	Dimension	Material
1	4	Corner column	KKR 150x150x8	S355J2H
2	4	Floor/Roof beam Shortside	KKR 250x150x6	S355J2H
3	4	Floor/Roof beam longside	KKR 250x150x6	S355J2H
4	4	Column plate top	PL50x150	S355N-Z35
5	4	Column plate bottom	PL50x150	S355N-Z35
6	4	Column center longside	KKR 100x6	S355J2H
7	4	Center column plate bottom	150x150x30	S355J2
8	4	Door pilars	KKR 100x6	S355J2H
9	10	Cross beam roof	KKR 120x5	S355J2H
10	20	Cross beam floor	UPE 160	S355J2
11	1	Floor plate	PL4X4350	S355MC

12	8	Connection/support plate	PL15X100x500	S355J2
13	1	Corrugated roof plate	3X13150	S235JR
14	3	Weather angle	L40X20x3	S355J2
15	2	Earth boss	D30	S355J2H
16	1	Drip plate	FLDPL X5-55-165	S355MC
17	1	Module ID tag	PL1x50	S355J2



Ekvägen 28
Box 3
SE 53421 Vara
Sweden

**SWEDISH
MODULES**

www.swedishmodules.com

Project

OCP

Client

Incubation committee

Engineer : M. Tietäväinen

Date : 2019-09-03

Responsible : R. Söderhäll

Date : 2019-09-03

Project Nr : Open Compute Project

Rev
Scale:

Description
Drawing nr:

Date :
Rev:

By

Steel structure